

NECTOR 200

Control panel for the complete management of refrigerated cells with single-phase compressor up to 2HP with Datalogger function and integrated connectivity. Designed to integrate safety, protection, control and ease of installation into a single solution.



APPLICATIONS

- Complete management of static or ventilated single-phase refrigeration systems up to 2HP, with off cycle or electric defrost, with direct compressor stop or pump-down in combination with the Datalogger / remote control function.
- Management of the single-phase evaporating unit only with freon solenoid valve consent and remote condensing unit consent in combination with the Datalogger / remote control function.


MAIN CHARACTERISTICS

- Direct management of compressor, defrost heaters, evaporator fans and cold room light.
- Wi-Fi, Ethernet and Bluetooth (BLE) connectivity.
- Bluetooth functions with MyPego app: complete remote control of the instrument, configuration of connectivity settings, display of daily history and system status.
- Cloud functions with MyPego app (function can be activated by subscription): real-time system control; daily history; real-time alarm messaging notification.
- Integrated local webserver.
- Datalogger function with up to 2 years' history.
- Humidification / dehumidification function with dedicated 4-20mA humidity probe.
- Condenser or evaporator fan speed management with 0-10V analogue output and dedicated pressure probe (probe not included).

- Off cycle, electric, hot gas and thermostat-controlled defrosting, also with real-time clock.
- Direct management of the solenoid valve for hot gas defrosting.
- Double evaporator management with dual end-of-defrost probe.
- Emergency operation (in case of faulty ambient probe).
- Pump-down operation.
- Configurable cold/hot/neutral zone mode.
- Energy saving (day / night setpoint management, smart defrosts).
- Integrated USB port for datalogger / parameter download and software update.
- Backup battery for data logging in the absence of the main power supply (optional).
- 7 configurable digital inputs.
- 2 configurable digital outputs.
- RS485 for connection to the TeleNET or ModBUS supervision network.

CONNECTION DIAGRAMS

(*) = Configurable function

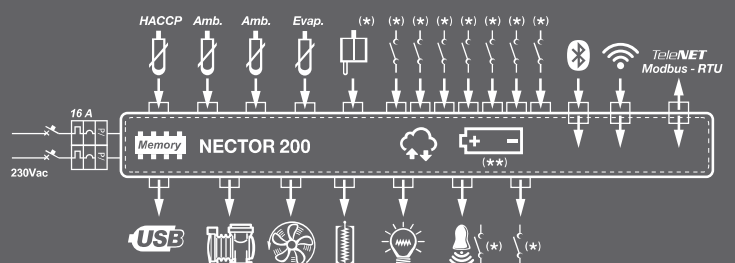



TECHNICAL CHARACTERISTICS	NECTOR 200
DIMENSIONS	300 x 200 x 100 mm
WEIGHT	2,4 kg
BOX PROTECTION RATING	IP65
BOX MATERIAL	SELF-EXTINGUISHING PC
INSULATION TYPE	CLASS II
AMBIENT CONDITIONS	
WORKING TEMPERATURE	0 +50 °C
STORAGE TEMPERATURE	-20 +60 °C
RELATIVE HUMIDITY	LOWER THAN 90 RH% (Non condensing)
ELECTRICAL SPECIFICATIONS	
SUPPLY VOLTAGE	110 – 240 V~ (± 10%)
POWER FREQUENCY	50 / 60 Hz
MAX ABSORBED POWER (electronic control)	10W
BATTERY (** optional)	12 V, NI-MH 1300 mAh, autonomy 40h
GENERAL ELECTRICAL PROTECTION (depending on the model)	BIPOLAR DIFFERENTIAL MAGNETOTHERMAL SWITCH 16A, CURVE C, ID=300mA
INPUT SPECIFICATIONS	
CONNECTABLE PROBE TYPES	4 NTC 10KΩ TEMPERATURE PROBES 1 4-20 mA PROBE configurable as 0-100RH% humidity or pressure
PROBE READ PRECISION	TEMPERATURE: 0,1 °C HUMIDITY / PRESSURE: 1 RH% / 0.1 Bar
READ RANGE	TEMPERATURE: -45 +99 °C HUMIDITY / PRESSURE: 0T100 RH% / 0.1 Bar
CONFIGURABLE DIGITAL INPUTS	7
DESIGNATION	
NORMATIVE REFERENCE	EN 12830
ADEQUACY	S (conservation)
TYPE OF CLIMATE ENVIRONMENT	A
ACCURACY CLASS	1
OUTPUT SPECIFICATIONS (voltage-free contacts)	
COMPRESSOR	1500 W (AC3) 30A
DEFROST	3000 W (AC1) (** depending on the model) 30A
FANS	500 W (AC3) 16A
COLD ROOM LIGHT	800 W (AC1) or 100W for LED lights 16A
CONFIGURABLE OUTPUT 1	100 W (AC1) 10A
CONFIGURABLE OUTPUT 2	100 W (AC1) 10A
ANALOGUE OUTPUT	0 – 10 V
CONNECTIVITY	
RS485 SERIAL	MODBUS-RTU / TELENET
BLUETOOTH	BLE LOW ENERGY
WIFI	802.11 B/G/N (2.4 GHZ) UP TO 150 Mbps
ETHERNET	10/100 Mbps